

COMBi-ESL

The electric sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.


COMBiLiFT

LIFTING INNOVATION




ncnielsen

COMBi-ESL 6000-8000

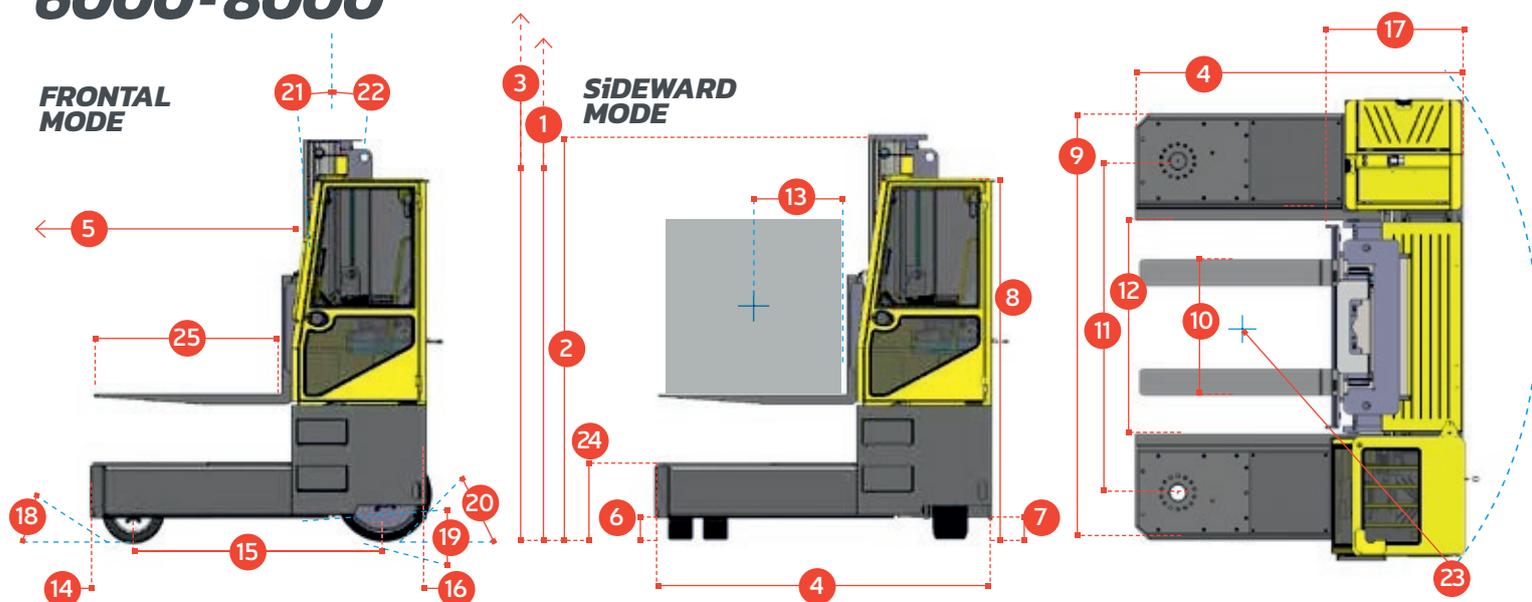

REF.	DESCRIPTION	C6000 ESL	C8000 ESL
1a	Max. Lift Height		4000mm
1b	Freelift Height		2000mm
2	Height Mast Closed		3000mm
3	Max. (Mast raised)		5000mm
4	Overall Length	2300mm	2500mm
5	Mast Travel	1350mm	1550mm
6	Ground Clearance Under Mast		170mm
7	Ground Clearance to Centre of Wheelbase		150mm
8	Height Over Cab (Without work lights)		2685mm
9	Width		3500mm
10	Outside Spread of Fork Arms		1600mm
11	Track Front		2560mm
12	Frame Opening		1650mm
13	Load Centre Distance	600mm	700mm
14	Overhang Front		320mm
15	Wheelbase	1645mm	1845mm
16	Overhang Back		335mm
17	Length From Face of Fork		1100mm
18	Approach Angle		45°
19	Ramp Angle		17°
20	Departure Angle		45°
21	Forward Tilt		3°
22	Backward Tilt		5°
23	Minimum Outside Radius		2870mm
24	Platform Height		590mm
25	Platform Length	1200mm	1400mm
A	Capacity	6000 kg	8000 kg
B	Unladen Weight	11,900 kg	12,200 kg
C	Maximum Ground Speed	10 km/h	
D	Gradeability	10%	
E	Battery Capacity	80 V / 930 Ah	
F	Fork Section	50mm x 200mm x 1200mm	70mm x 200mm x 1400mm
G	Front Tyre (Solid Rubber) x 4	OD 457mm / Width 178mm	
H	Rear Tyre (Solid Rubber) x 2	OD 711mm / Width 254mm	
I	Standard Colour	Yellow & Grey	
J	AC Electric Traction Motor x 2	80V / 6kW	
K	AC Electric Pump Motor	80V / 39kW	

Multi-Directional

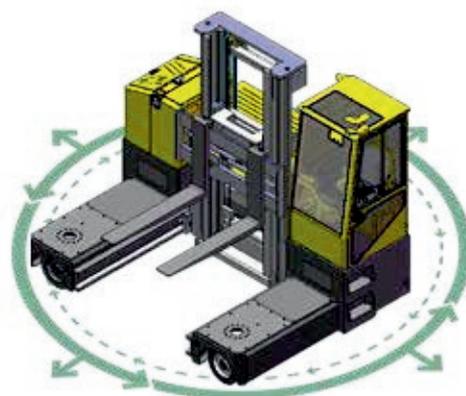

Features Include:

- Rubber Mounted Cabin
- Multi-Direction Operation
- AC Motor Technology
- 4-way lever positioning of Wheels
- 2 Wheel Drive

ncnielsen

Nørregade 66
7860 Balling

Telefon 99 83 83 83

www.nc-nielsen.dk • info@nc-nielsen.dk

COMBLIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

nc-nielsen.dk