



COMBiliFT


COMBILIET

Multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.



ncnielsen

C-SERiES C3500-C5000

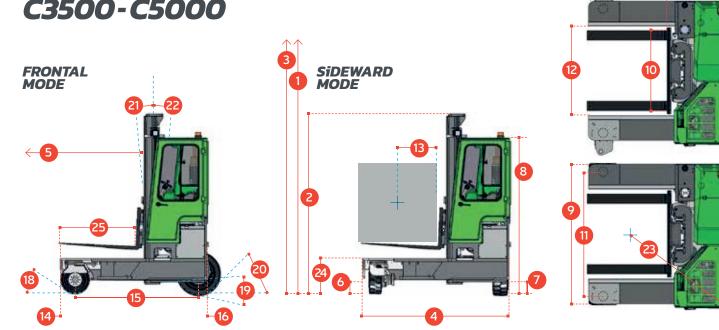

REF.DESCRIPTIONC3500C4000C5001aMax. Lift Height4040mm1bFreelift Height0mm2Height Mast Closed2855mm3Max. Mast raised4870mm4Overall Length1950mm2300mm5Mast Travel950mm1300mm6Ground Clearance Under Mast150mm7Ground Clearance to Centre of Wheelbase200mm8Height Over Cab (Without work lights)2435mm9Width2190mm10Outside Spread of Fork Arms1350mm	۱m
1bFreelift HeightOmm2Height Mast Closed2855mm3Max. Mast raised4870mm4Overall Length1950mm2300mm5Mast Travel950mm1300mm1400m6Ground Clearance Under Mast150mm150mm7Ground Clearance to Centre of Wheelbase200mm88Height Over Cab (Without work lights)2435mm9Width2190mm	
2 Height Mast Closed 2855mm 3 Max. Mast raised 4870mm 4 Overall Length 1950mm 2300mm 2500m 5 Mast Travel 950mm 1300mm 1400m 6 Ground Clearance Under Mast 150mm 200mm 1400m 7 Ground Clearance to Centre of Wheelbase 200mm 2300mm 1400m 8 Height Over Cab (Without work lights) 2435mm 2190mm	
3 Max. Mast raised 4870mm 4 Overall Length 1950mm 2300mm 2500m 5 Mast Travel 950mm 1300mm 1400m 6 Ground Clearance Under Mast 150mm 150mm 7 Ground Clearance to Centre of Wheelbase 200mm 200mm 8 Height Over Cab (Without work lights) 2435mm 2190mm	
4Overall Length1950mm2300mm2500m5Mast Travel950mm1300mm1400m6Ground Clearance Under Mast150mm150mm7Ground Clearance to Centre of Wheelbase200mm188Height Over Cab (Without work lights)2435mm2190mm9Width2190mm1900mm	
5Mast Travel950mm1300mm1400m6Ground Clearance Under Mast150mm7Ground Clearance to Centre of Wheelbase200mm8Height Over Cab (Without work lights)2435mm9Width2190mm	
6Ground Clearance Under Mast150mm7Ground Clearance to Centre of Wheelbase200mm8Height Over Cab (Without work lights)2435mm9Width2190mm	ım
7Ground Clearance to Centre of Wheelbase200mm8Height Over Cab (Without work lights)2435mm9Width2190mm	
8Height Over Cab (Without work lights)2435mm9Width2190mm	
9 Width 2190mm	
9 Width 2190mm	
10 Outride Spread of Early Arms 1250mm	
IO Outside Spread OFFORK ATTIS ISSUMM	
11 Track Front 1980mm	
12 Frame Opening 1400mm	
13 Load Centre Distance 600mm	
14 Overhang Front 245mm	
15 Wheelbase 1565mm 1915 mm 2115m	m
16 Overhang Back 140mm	
17 Length From Face of Fork 1100mm 1100mm 1150m	m
18 Approach Angle 45°	
19 Ramp Angle 29°	
20 Departure Angle 45°	
21 Forward Tilt 3°	
22 Backward Tilt 5°	
23 Minimum Outside Radius 2000mm 2325mm 2490n	nm
24 Platform Height 545mm	
25 Platform Length 850mm 1200mm 1350m	m
A Capacity 3500 kg 4000 kg 5000	kg
D Unladen Weicht (200 ha (200 ha	kg
B Unladen Weight 6050 kg 6300 kg 6800	
C Maximum Ground Speed 15 km/h	
C Maximum Ground Speed 15 km/h	
CMaximum Ground Speed15 km/hDGradeability15%	
CMaximum Ground Speed15 km/hDGradeability15%EKubota V2403 T Diesel / 3 ltr GM LPG44 kW / 48 kW	m
CMaximum Ground Speed15 km/hDGradeability15%EKubota V2403 T Diesel / 3 ltr GM LPG44 kW / 48 kWFElectrics12 Volt	ım
CMaximum Ground Speed15 km/hDGradeability15%EKubota V2403 T Diesel / 3 ltr GM LPG44 kW / 48 kWFElectrics12 VoltGFork Section 150mm x 50mm x850mm1200mm	ım
CMaximum Ground Speed15 km/hDGradeability15%EKubota V2403 T Diesel / 3 ltr GM LPG44 kW / 48 kWFElectrics12 VoltGFork Section 150mm x 50mm x850mm1200mmH200 / 50 x 10 Front Tyre0D450mm / Width 200 mm	ım

European Patent No. 2167416; Brazilian Patent No. P10811954-6; Australian Patent No. 2008253242

 Multi-Directional

Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

ncnielsen

Nørregade 66 7860 Balling Telefon 99 83 83 83 www.nc-nielsen.dk • info@nc-nielsen.dk

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

nc-nielsen.dk